


## SPECIFICATIONS

| Size                                | Metric      | British          |
|-------------------------------------|-------------|------------------|
| Max. Working Height <b>A</b>        | 19.00m      | 62ft 4in         |
| Max. Platform Height <b>B</b>       | 17.00m      | 55ft 9in         |
| Overall Length <b>C</b>             | 4.46m       | 14ft 8in         |
| Overall Width <b>D</b>              | 2.29m       | 7ft 6in          |
| Overall Height(Rails Up) <b>E</b>   | 3.60m       | 11ft 10in        |
| Overall Height(Rails Down) <b>F</b> | 2.75m       | 9ft              |
| Platform Size(Length×Width)         | 4.06m×2.00m | 13ft 4in×6ft 7in |
| Platform Extension Size <b>G</b>    | 2.00m       | 6ft 7in          |
| Ground Clearance                    | 0.40m       | 1ft 4in          |
| Wheelbase <b>H</b>                  | 2.85m       | 9ft 4in          |
| Turning Radius(Inside/Outside)      | 1.00m/3.20m | 3ft 3in/10ft 6in |
| Tyres                               | 33×12-20    | 33×12-20         |

| Performance                     |           |           |
|---------------------------------|-----------|-----------|
| S.W.L                           | 680kg     | 1499lb    |
| S.W.L On Extension              | 680kg     | 1499lb    |
| Max. Occupants (Indoor/Outdoor) | 4/4       | 4/4       |
| Gradeability                    | 40%       | 40%       |
| Travel Speed(Stowed)            | 4.5km/h   | 2.80mph   |
| Travel Speed(Raised)            | 0.6km/h   | 0.37mph   |
| Max. Working Slope              | X-2°/Y-3° | X-2°/Y-3° |
| Up/Down Speed                   | 70/70sec  | 70/70sec  |

| Weight         |         |         |
|----------------|---------|---------|
| Overall Weight | 10530kg | 23214lb |

| Power          |                |                |
|----------------|----------------|----------------|
| Diesel Engine  | 36.4kW/2600rpm | 36.4kW/2600rpm |
| Diesel Tank    | 100L           | 26gal          |
| Hydraulic Tank | 135L           | 35gal          |

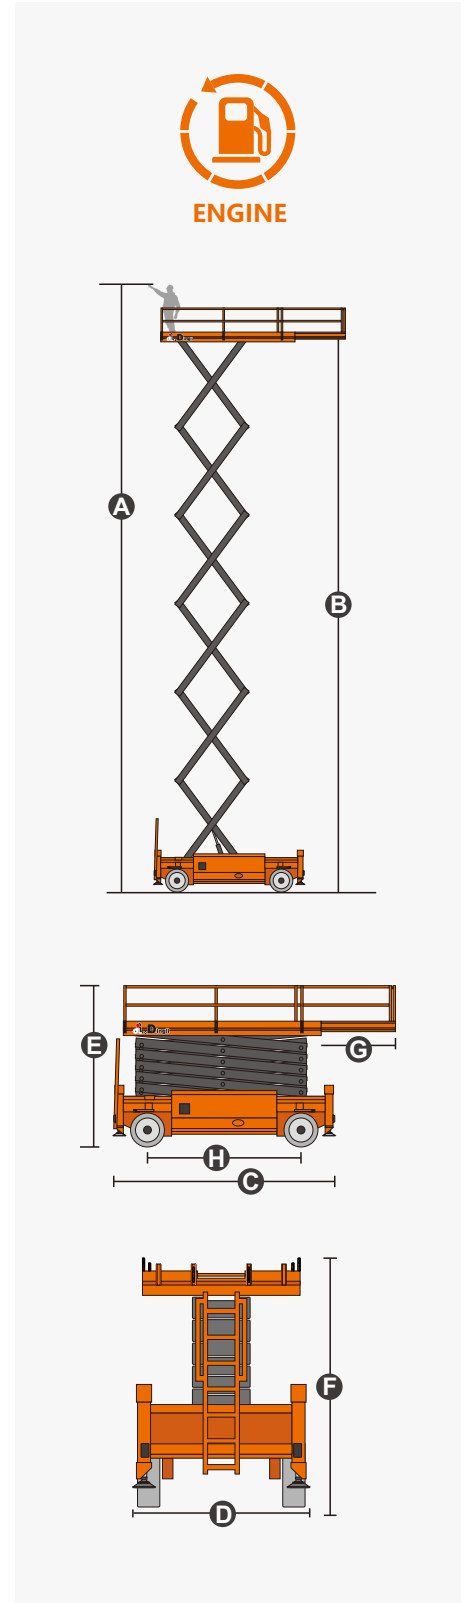

CE EN 280

## FEATURES

### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Charging Indicator
- Four-Wheel Drive
- Four-Wheel Steering
- Four-Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Automatic One-Way Platform Extension Deck
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height



### ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: [export@cndingli.com](mailto:export@cndingli.com)

[Https://en.cndingli.com](https://en.cndingli.com)

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2024-05

