


SPECIFICATIONS

| Size | Metric | British |
|-------------------------------------|-------------------|--------------------------|
| Max. Working Height | 28.50m | 93ft 6in |
| Max. Platform Height | 26.50m | 86ft 11in |
| Max. Operating Range(+0.6m) | 21.80m | 71ft 6in |
| Max. Platform Range | 21.20m | 69ft 7in |
| Flatbed Transport Dimensions(L×W×H) | 8.75m×2.50m×2.96m | 28ft 8in×8ft 2in×9ft 8in |
| Standard Container Transport | All Applicable | All Applicable |
| Platform Size(Length×Width) | 2.44m×0.91m | 8ft×3ft |
| Turntable Tailswing | 1.61m | 5ft 3in |
| Ground Clearance A | 0.41m | 1ft 4in |
| Wheelbase B | 2.80m | 9ft 2in |
| Turning Radius(Inside/Outside) | 1.87m/3.22m | 6ft 2in/10ft 7in |
| Tyres | 385/45-28 | 385/45-28 |


| Performance | | |
|----------------------|----------------|----------------|
| S.W.L | 454kg | 1000lb |
| Max. Occupants | 3 | 3 |
| Gradeability | 45% | 45% |
| Travel Speed(Stowed) | 6.0km/h | 3.7mph |
| Travel Speed(Raised) | 1.1km/h | 0.7mph |
| Max. Working Slope | X-5°/Y-5° | X-5°/Y-5° |
| Turret Rotation | 360°Continuous | 360°Continuous |
| Platform Rotation | 180° | 180° |
| Jib Movement | 135° | 135° |

| Weight | | |
|----------------|---------|---------|
| Overall Weight | 18400kg | 40565lb |

| Power | | |
|------------------------|-----------------------|-----------------------|
| Diesel Engine | Deutz TD2.9 L4/55.4kW | Deutz TD2.9 L4/55.4kW |
| Emergency Power System | 12V | 12V |
| Diesel Tank | 135L | 35gal |
| Hydraulic Tank | 165L | 43gal |

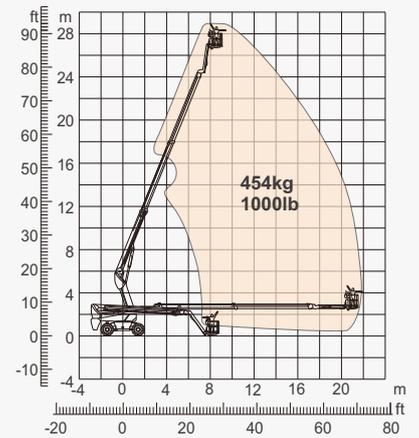

Range Of Motion

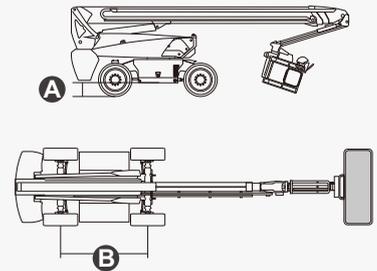

FEATURES

Standard Items

- 2.31m(7ft 7in) Jib
- Front Oscillating Axle
- Four-Wheel Steering
- Four-Wheel Drive
- Self-Leveling Platform
- 180° Left And Right Swing Platform
- Proportional Joystick Controls
- Thumb Rocker Steer
- Drive Enable
- Ac Power Cord To Platform
- Tilt Alarm
- Descent Alarm
- Flash
- Horn
- Hour Meter
- Integral Integrated Special Drive Axle For Construction Machinery
- 360° Continuous Turntable Rotation
- Positive Traction Four Wheel Drive
- Platform Load Sense System
- Fault Diagnosis System
- Operator Anti-crushing Protection System
- Harsh Environment Kits
- 12V DC Auxiliary Power
- Deutz D2.9 L4 55.4kW /2600rpm Diesel Engine
- Hydraulic Oil Radiator
- Anti-restart Engine Protection
- Anti-reverse Engine Device
- Auto Engine Fault Shutdown



Telescopic Boom-BT



Working Height-28m



Barb Jib-B



Diesel Engine



Rough Terrain-RT



454kg-Heavy Load



Multiple Steering Modes



Anti Extrusion Device



Barb Jib

ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

Https://en.cndingli.com

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2025-03

