


SPECIFICATIONS

Size	Metric	British
Max. Working Height A	7.80m	25ft 7in
Max. Platform Height B	5.80m	19ft
Overall Length C	1.86m	6ft 1in
Overall Width D	0.76m	2ft 6in
Overall Height(Rails Up) E	2.15m	7ft 1in
Overall Height(Rails Down) F	1.83m	6ft
Platform Size(Length×Width)	1.67m×0.74m	5ft 6in×2ft 5in
Platform Extension Size G	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.09m/0.016m	4in/1in
Wheelbase H	1.36m	4ft 6in
Turning Radius(Inside/Outside)	0m/1.64m	0in/5ft 5in
Tyres	Φ323×100mm	Φ323×100mm

Performance		
S.W.L	230kg	507lb
S.W.L On Extension	113kg	249lb
Max. Occupants (Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	4.0km/h	2.49mph
Travel Speed(Raised)	0.6km/h	0.37mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	21/25sec	21/25sec

Weight		
Overall Weight	1610kg	3549lb

Power		
Hydraulic Tank	6.5L	1.7gal
Lead-acid Battery	24V/185Ah	24V/185Ah
Lithium Battery	24V/180Ah	24V/180Ah
Charger	24V/30A	24V/30A
Lifting Motor	16VAC/3kW	16VAC/3kW

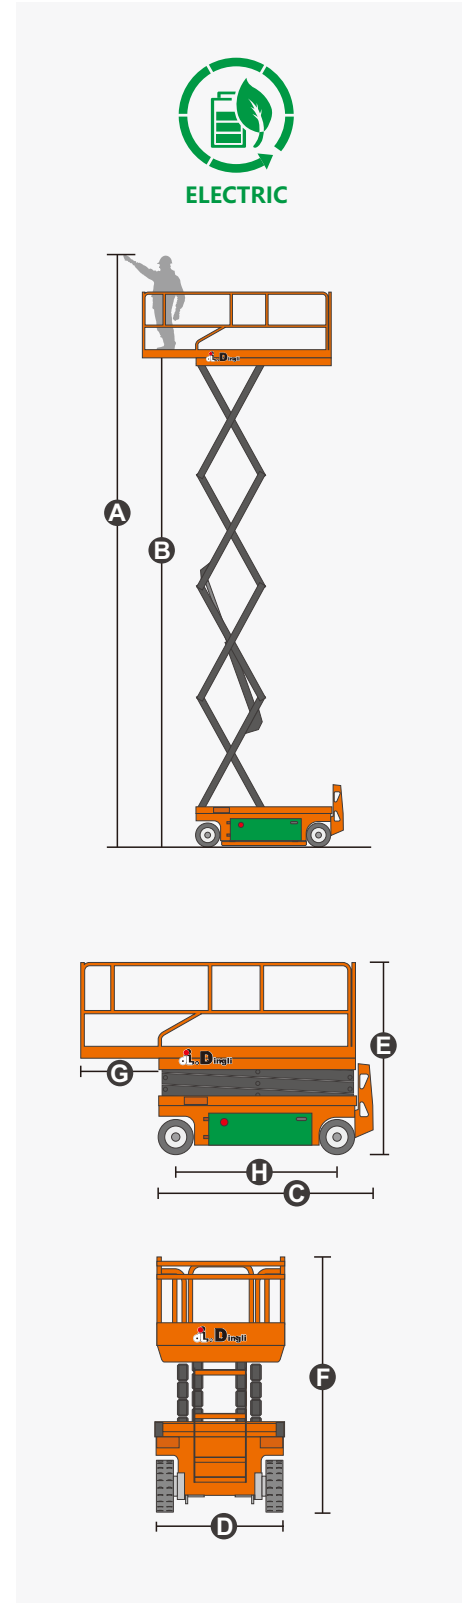

CE EN 280

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

[Https://en.cndingli.com](https://en.cndingli.com)

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2025-03

